





# ECO D-310 Plate handle

## Product information



### ■ SYSTEM TECHNOLOGY FOR THE DOOR




**Product characteristics**

|  |                |
|--|----------------|
| Tested acc. to   | <b>EN 1906</b> |
| With 9 mm spindle acc. to DIN 18273 fire protection tested | <b>F</b>       |
| Restoring spring   | -              |
| Fixable bearing  | ■              |
| Steel base with positioning studs                          | ■              |
| Concealed through-screw technology                         | ■              |
| DIN left / right   | ■              |

Classification key EN 1906

|   |   |   |    |   |   |   |   |
|---|---|---|----|---|---|---|---|
| 4 | 7 | - | B1 | 1 | 4 | 0 | U |
|---|---|---|----|---|---|---|---|

■ Yes - No □ Option

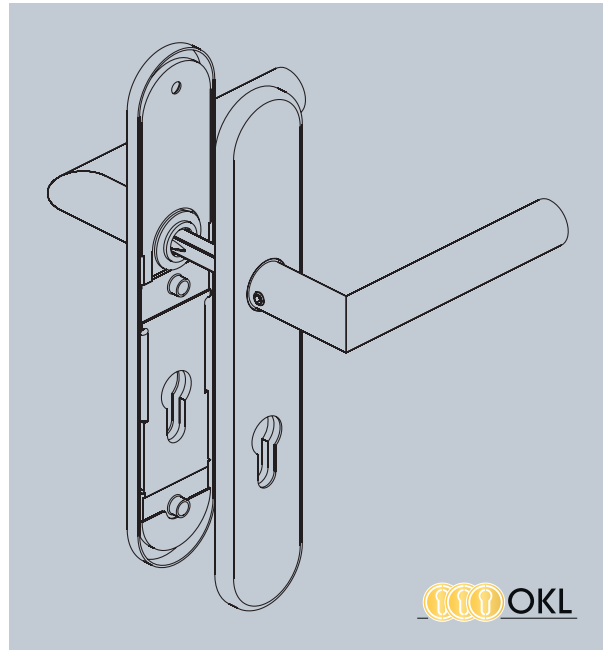

Material:




Bearing technology:




**PRODUCT FAMILY D-300**

**Standard handle**




D-310                      D-330

**Long- / short plate handle**

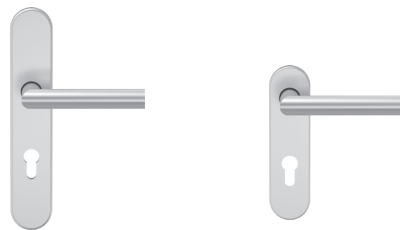


D-310                      D-310

**Oval rose handle**

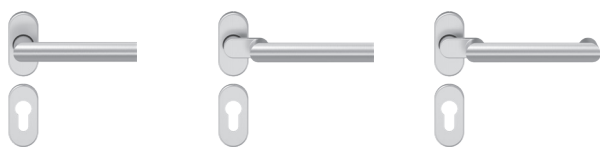

D-310                      D-315                      D-335

**Security handle**

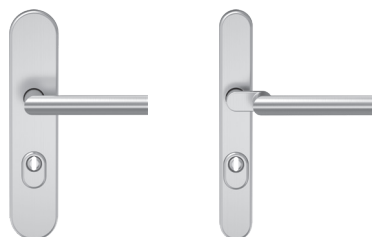

D-310                      D-315

**Window handle**



F-310

# D-310 Long plate (L)




## D-310 Long plate (L) with OKL – ball bearing technology


The lever is clenched inside the inner ring of the ball-bearing. The outer ring of the ball-bearing is fixed into the base construction. This connection guarantees an additional lasting of the lever sets on the door leaves and is known for high capacity in axial and radial direction.

Utilization category class 4

PZ 92 hole on request. Positioning studs Ø 8 x 5 mm

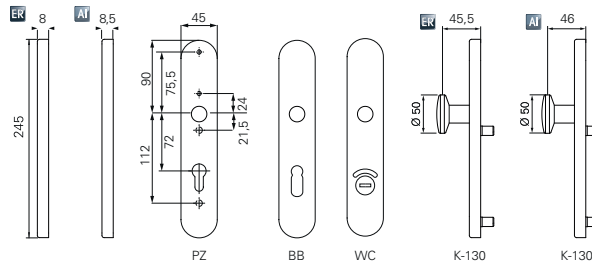

### OKL MAGIS – LONG PLATE HANDLE (L)




EN 1906 **F**

**F** = 4 7 - B1 1 4 0 U



|          |       | Sets |           |           |           |           |
|----------|-------|------|-----------|-----------|-----------|-----------|
|          | ∅     | ∇    |           |           |           |           |
| <b>S</b> | 22 mm | 8 mm | 1k6705.46 | 1k6700.46 | 1k6715.46 | 1k6720.46 |
| <b>F</b> | 22 mm | 9 mm | 3k6705.46 |           | 3k6715.46 |           |

Finish: Stainless steel satin brushed



EN 1906 **F**

**F** = 4 7 - D1 1 4 0 U



|          |       | Sets |           |           |           |           |
|----------|-------|------|-----------|-----------|-----------|-----------|
|          | ∅     | ∇    |           |           |           |           |
| <b>S</b> | 22 mm | 8 mm | 1k7705.30 | 1k7700.30 | 1k7715.30 | 1k7720.30 |
| <b>F</b> | 22 mm | 9 mm | 3k7705.30 |           | 3k7715.30 |           |

Finish: Aluminium anodized F1, further colours on request


# D-310 Long plate (L)



## D-310 Long plate (L) with OGI – friction bearing technology

Lever guidance consists of a closed, maintenance-free friction bearing with self-lubricating plastic. Fixable bearing. DIN left / DIN right useable. Steel base with positioning studs. Concealed, continuous screw connection.

Utilization category class 4  
 PZ 92 hole on request. Positioning studs Ø 8 x 5 mm

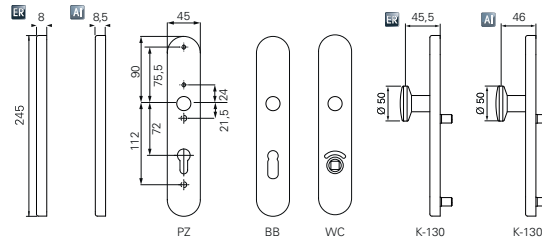

### OGI – LONG PLATE HANDLE (L)



EN 1906 **F**

**F** = 4 7 - B1 1 4 0 U

|          |       | Sets |           |           |           |           |
|----------|-------|------|-----------|-----------|-----------|-----------|
|          | ∅     | ▧    |           |           |           |           |
| <b>S</b> | 22 mm | 8 mm | 1g6705.46 | 1g6700.46 | 1g6715.46 | 1g6720.46 |
| <b>F</b> | 22 mm | 9 mm | 3g6705.46 |           | 3g6715.46 |           |

Finish: Stainless steel satin brushed



EN 1906 **F**

**F** = 4 7 - D1 1 4 0 U

|          |       | Sets |           |           |           |           |
|----------|-------|------|-----------|-----------|-----------|-----------|
|          | ∅     | ▧    |           |           |           |           |
| <b>S</b> | 22 mm | 8 mm | 1g7705.30 | 1g7700.30 | 1g7715.30 | 1g7720.30 |
| <b>F</b> | 22 mm | 9 mm | 3g7705.30 |           | 3g7715.30 |           |

Finish: Aluminium anodized F1, further colours on request


# D-310 Short plate (K)




## D-310 Short plate with OGL – friction bearing technology

Lever guidance consists of a closed, maintenance-free friction bearing with self-lubricating plastic. Fixable bearing. DIN left / DIN right useable. Steel base with positioning studs. Concealed, continuous screw connection.

Utilization category class 4. Positioning studs  $\varnothing 8 \times 5$  mm

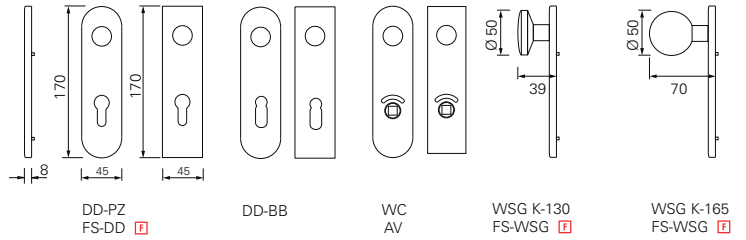

### OGL – SHORT PLATE HANDLE (K)




EN 1906 **F**

**F** = 4 7 - B1 1 4 0 A/U



|          |               |          | Sets      |           |           |           |           |           | Passive leaf sets |                     |
|----------|---------------|----------|-----------|-----------|-----------|-----------|-----------|-----------|-------------------|---------------------|
|          | $\varnothing$ | $\nabla$ |           |           |           |           |           |           |                   |                     |
| <b>S</b> | 21 mm         | 8 mm     |           | 106705.46 | 106700.46 | 106710.46 | 106760.46 | 106720.46 |                   |                     |
| <b>F</b> | 21 mm         | 9 mm     | 306781.46 | 306700.46 |           | 306760.46 | 306763.46 |           | 306725.46         | 306718.46 306717.46 |

Finish: Stainless steel satin brushed. PVD and polished on request



EN 1906 **F**

**F** = 4 7 - D1 1 4 0 U



|          |               |          | Sets      |           |           |           |           |           | Passive leaf sets |                     |
|----------|---------------|----------|-----------|-----------|-----------|-----------|-----------|-----------|-------------------|---------------------|
|          | $\varnothing$ | $\nabla$ |           |           |           |           |           |           |                   |                     |
| <b>S</b> | 22 mm         | 8 mm     |           |           | 107705.30 | 107700.30 | 107710.30 | 107720.30 |                   |                     |
| <b>F</b> | 22 mm         | 9 mm     | 307781.30 | 307783.30 | 307700.30 |           | 307760.30 |           | 307704.30         | 307718.30 307717.30 |

Finish: Aluminium anodized F1, further colours on request


# D-310 Short plate (K) square




## D-310 Short plate with OGI – friction bearing technology

Handle guide with a maintenance-free plain bearing made of self-lubricating plastic. Fixed rotary handle with bearings. DIN-left &#x2F; DIN-right usable. Steel substructure with support cams. Concealed, continuous screw connection.

User category Class 4, support cams  $\varnothing 8 \times 5$  mm

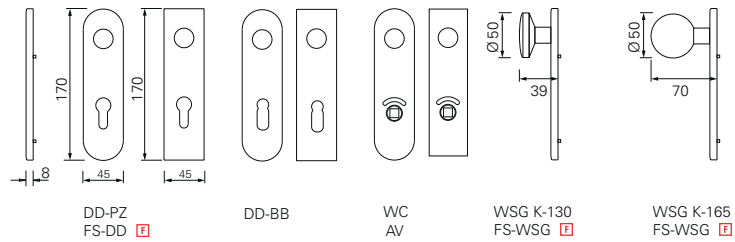

### OGI – SHORT PLATE HANDLE (K)



EN 1906 **F**

**F** = 4 7 - D1 1 4 0 U



|          | ∅     | ▧    | Sets      |           |           |           |           |           | Passive leaf sets |                     |
|----------|-------|------|-----------|-----------|-----------|-----------|-----------|-----------|-------------------|---------------------|
|          |       |      |           |           |           |           |           |           |                   |                     |
| <b>S</b> | 22 mm | 8 mm |           |           | 147705.30 | 147700.30 | 147710.30 | 147720.30 |                   |                     |
| <b>F</b> | 22 mm | 9 mm | 347781.30 | 347783.30 | 347700.30 |           | 347760.30 |           | 347704.30         | 347718.30 347717.30 |

Surface: aluminium anodised F1, other colours on request.

ECO Schulte GmbH & Co. KG  
Iserlohner Landstraße 89  
D - 58706 Menden

Telefon: +49 2373/9276-0  
Fax: +49 2373/9276-40

[info@eco-schulte.de](mailto:info@eco-schulte.de)  
[www.eco-schulte.de](http://www.eco-schulte.de)

© ECO Schulte GmbH & Co. KG - Änderungen vorbehalten  
© ECO Schulte GmbH & Co. KG - Subject to change